

Job: _____ Engineer: _____
 Location: _____ Architect: _____
 Schedule No.: _____ Date: _____
 System Designation: _____ For: Reference Approval Review Construction

FEATURES

- All DC Inverter Technology
- Wide Application Range
- Flexible Control and Easy Maintenance
- Golden Fin
- 3mts Aluminum-cooper Refrigerant Piping
- Cooling Only
- 3.5 mts Power Cable
- Convenient Installation



Indoor Unit Model		ECTI-36L0417		
Outdoor Unit Model		ECTO-36L0417		
Nameplate Parameter	Rated Capacity	W	9,964	
		Btu/h	34,000	
		Kg/h	4	
	Rated Cooling	W	4,050	
		A	16.5	
	ELECTRICAL DATA			
	Max. Input Power	W	4200	
	Max. Input Current	A	17	
	EER Cooling	W/W	SEER16.5	
	Power supply source	V/Ph/Hz	208~230V/1/60Hz	
GENERAL DATA				
Refrigerant	Type		R410A	
	Charged	g	2500	
Max. Discharge Pressure	Mpa		4.15	
Max. Suction Pressure	Mpa		1.15	
Air Flow Volume	m3/h		1600	
	cfm		936	
Noise level	dB (A)		53 ~ 60	
Indoor unit ECTI	Dimension Inner size	Net Dimension (WidthxDepthxHeight)	mm 1250x358x253	
		Packing Dimension (WidthxDepthxHeight)	mm 1340x445x355	
	Indoor unit weight (Net)	Kg		18
Outdoor unit ECTO	Dimension External machine size	Net Dimension (WidthxDepthxHeight)	mm 900x700x350	
		Packing Dimension (WidthxDepthxHeight)	mm 1015x762x425	
	Outdoor unit weight (Net)	Kg		51
Container Loading 40HC Packing quantity		set	126	



OPTIONAL ACCESSORIES

Wi-Fi USB (not included)

DIMENSIONAL DRAWINGS - INCHES (MM)

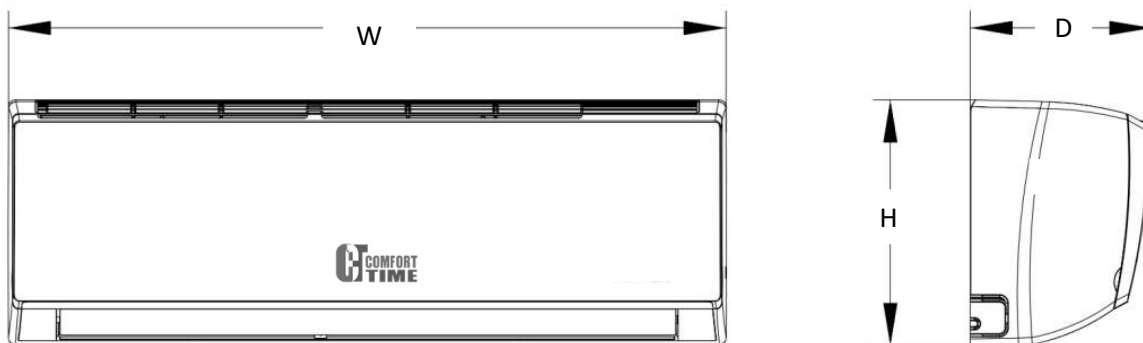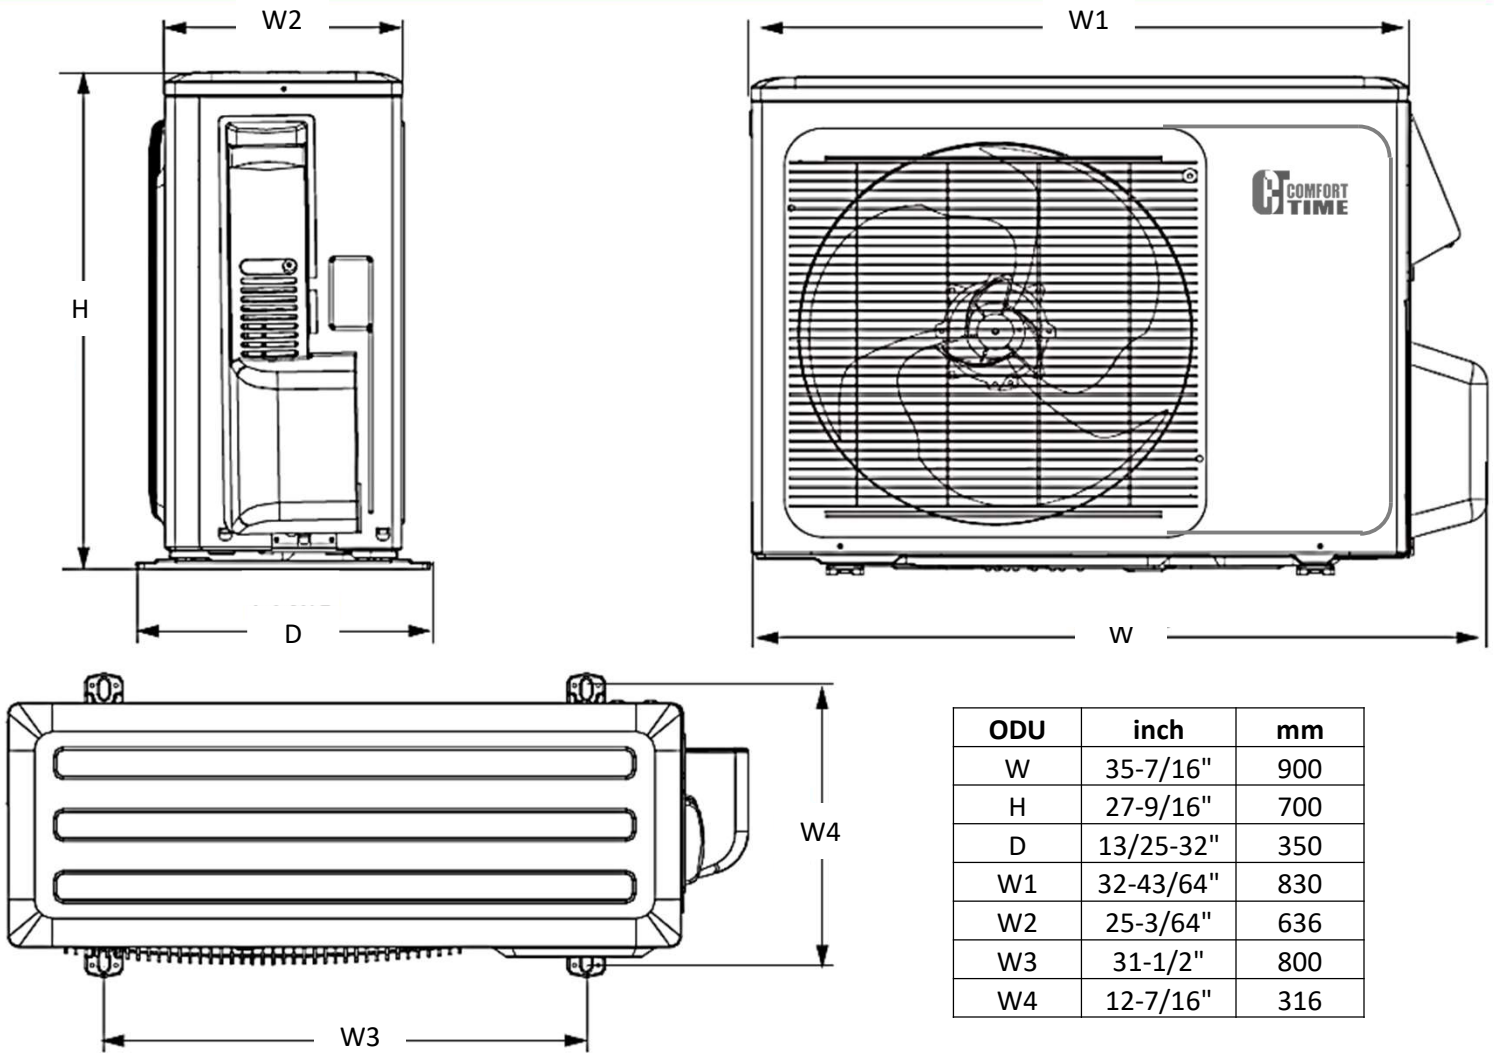

IDU	inch	mm
W	49-7/32"	1,250
H	14-3/32"	358
D	9-61/64"	253

Note – Due to Comfort Time ongoing commitment to quality, specifications, ratings and dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service, Maintenance and operation may cause properly damage on personal injury. Installation, service and operation must be performed by a qualified installer, servicing and operation agency.